





NLI Fujioka Factory has adopted ISO 9001 to be certified its quality control technology for Industrial Sewing Machine and relative products.

## BAG SEWING MACHINE HEAD

# DR-3A

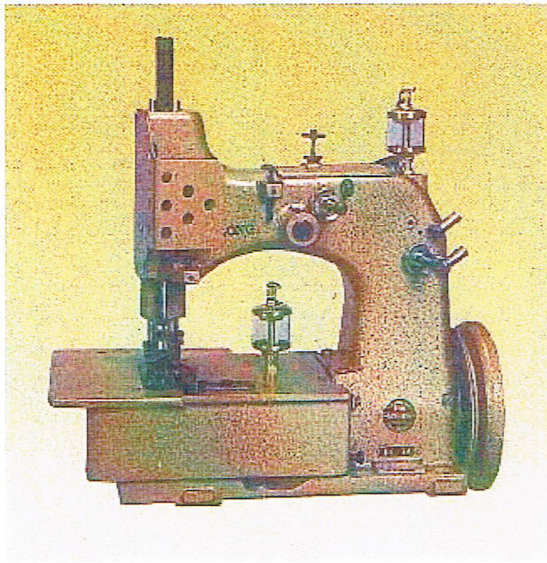

Single Needle, Plain Feed, Flat Bed, Double Thread Chain Stitch Machine for seaming and hemming openings of very heavy weight fabric such as jute or PP/PE woven cloth bags. Extra heavy duty machine for sewing very thick material with chain stitch. Single thread chain stitch is available by replacing some parts.

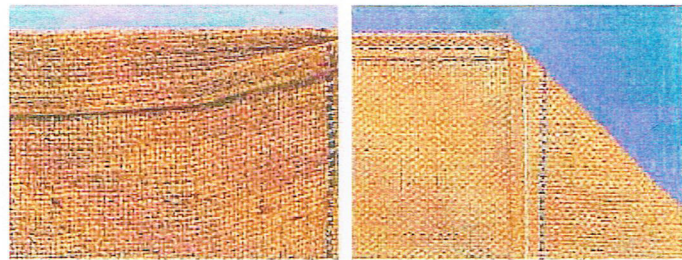

### 1. Specifications/仕様

Seam specification and stitch type	縫い形式	401-SSa-1
Stitch Range	縫い目幅	6.5mm-15mm
Standard Setting of Range	標準縫い目幅	10mm
Maximum thickness of material	最大縫い厚	15mm maximum
Feed	送り方式	Plain Feed 普通送り
Needle Type and size	針	UO1975-280
Thread (Cotton or jute)	綿糸、麻糸	Cotton, synthetic and jute 綿糸、麻糸、化繊糸
Working speed	作業回転数	1,850rpm
Maximum speed	最高回転数	2,000rpm
Motor speed	モーター回転数	2,800rpm (50Hz) / 3,400rpm (60Hz)
Motor pulley diameter	モータープーリー	φ105mm (50Hz) / φ90mm (60Hz)
V-belt type and size	Vベルト	M41 (50Hz) / M40 (60Hz)

DESCRIPTION  
One-needle two-thread jute bag sewing machine

説明  
1本針 2本糸 麻袋縫いマシン

APPLICATION  
Double-thread chain stitch machine for thin to thick fabrics such as jute bags, PP container bags, etc.

適用  
麻袋、PP コンテナバックなどの薄物から厚物までの織物の2重環縫いマシン



### NEWLONG INDUSTRIAL CO., LTD.

8-14, Shiratori 4-chome, Katsushika-ku, Tokyo 125-0063, Japan

Tokyo Head Office

PHONE +81-3-3603-2276

FAX +81-3-3603-2253

Mechanical Design Engineering Dept

PHONE +81-3-3603-2252

FAX +81-3-3602-2694

NLI Group Home Page URL/E-mail

URL <http://nlwww.com/>

E-mail [nli@nlwww.com](mailto:nli@nlwww.com)